


Coupling (shut-off) tube connection M5



Basic information

Part number	196.025.012.300.000
Category	Contact

Contact insert description

Contact type	Fluid socket
Termination type	Screw termination
Shut-off	Yes

Mechanical and environmental data

Mating cycles	10000
Max. operating temperature	125 °C
Min. operating temperature	-40 °C
Max. operating pressure	10 bar
Weight	4.17 g


Material and surface treatments

Material	Cu-alloy with matt chrome finish
----------	----------------------------------

ODU reserves the right to make changes based on the current state of knowledge without prior notice without being obliged to provide replacement deliveries or refinements of older designs.

Graphics and technical drawings

FLOW RATE DIAGRAM

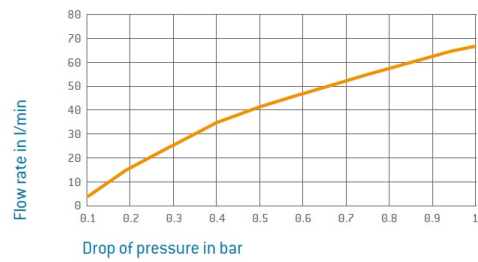

The flow rate diagram refers to the locking version with a maximum gap between socket and pin piece of ≤ 0.5 mm. If the clearance is modified, the drop of pressure increases.

Further technical information and downloads

[3D-File \(STP File\)](#)

[Assembly Instruction](#)